


App Control with ComfoConnect LAN C



Zehnder ComfoConnect LAN C

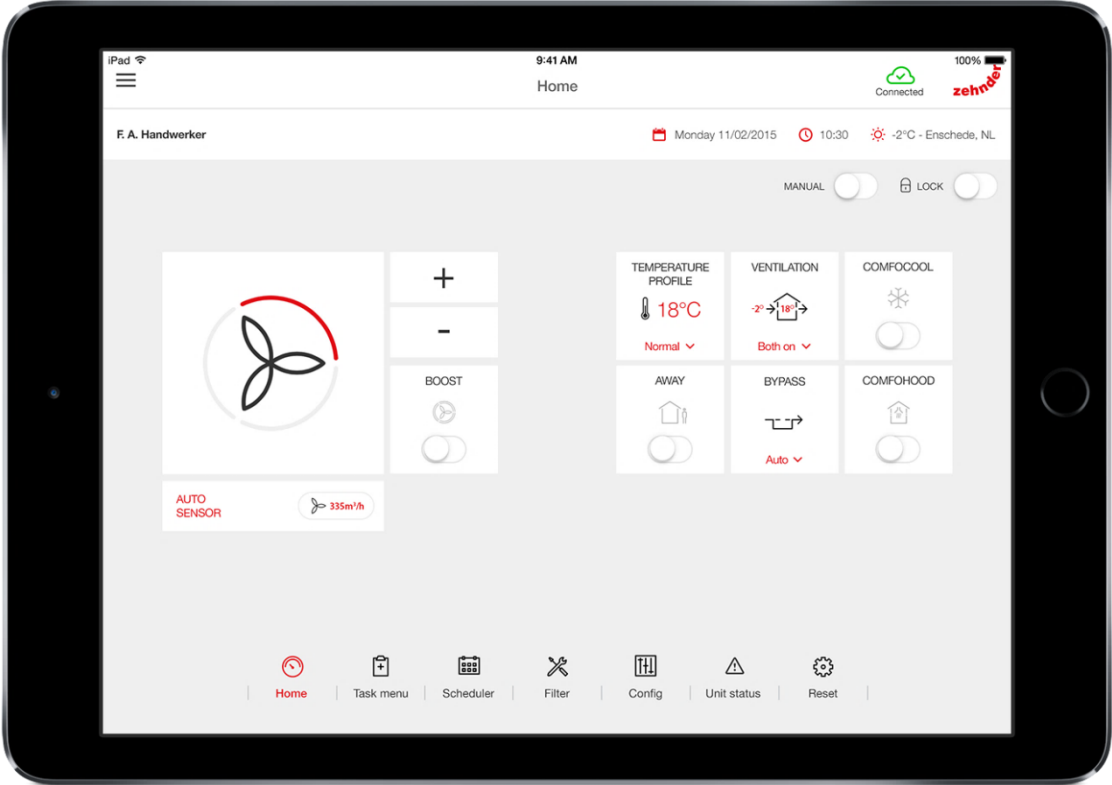



- The gateway-only package for local and remote use of the Zehnder control App for ComfoAir Q
- Dimensions: 120 x 76 x 24 mm,
- No cables included
- Powered by ComfoNet,
- Typical use: fixed installation together with a ComfoAir Q installation in a house/dwelling.




Zehnder Control App



- Local and remote use
- 4 user levels:
 - user,
 - advanced user,
 - installer,
 - Registered installer (with cloud login)
- All ventilation system functions accessible
- Extended commissioning wizard
- ComfoAir Q firmware update
- Read out and send unit data (documentation, service)
- Remote support by registered installers
- No password or subscription required for end-user.
- Data protection by encryption and blocking outside access.

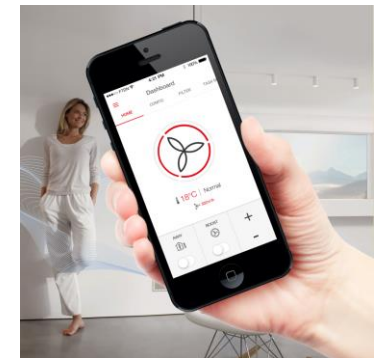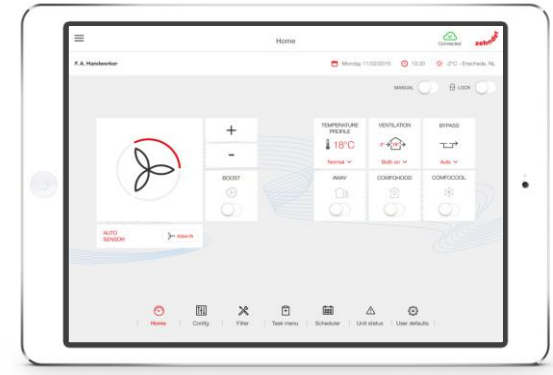


Zehnder Control App – Screen 1 Ipad

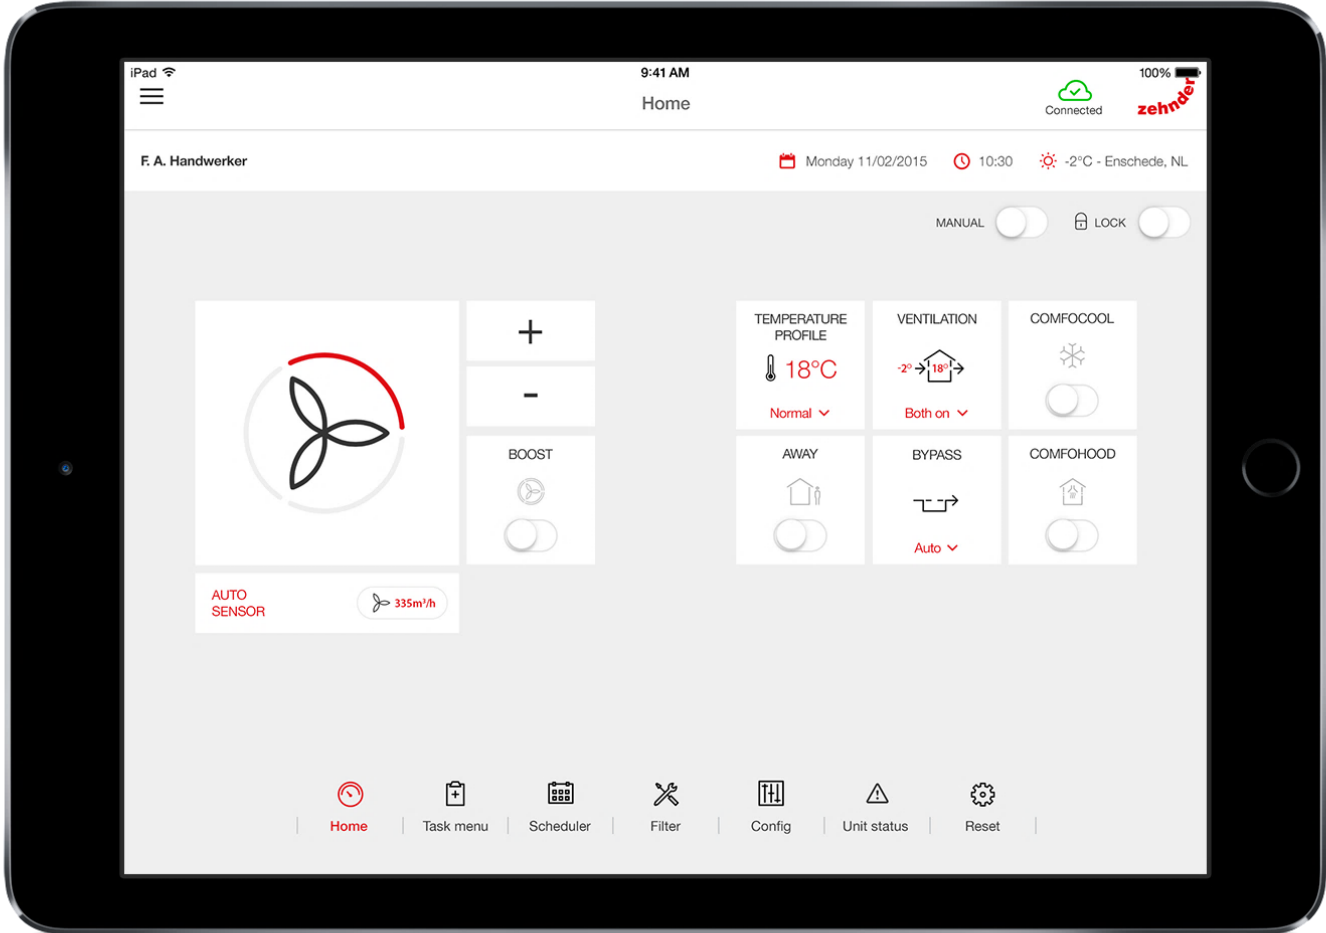

Zehnder Control App – Status screens on iPhone




●●●● KPN NL 15:11 56%

Unit status 

E TASKS SCHEDULER CONFIGURATION **UNIT STATUS**

| Unit | |
|------------------------|-----------------------------|
| HRU Type | ComfoAirQ 450 |
| Firmware | R.0.20.5 |
| Serial Number | 012345678901234567890123... |
| Temperature & Humidity | |
| Extract Air | 22.8 °C / 43% |
| Exhaust Air | 23.1 °C / 38% |
| Outdoor Air | 22.9 °C / 47% |
| Supply Air | 23.1 °C / 38% |
| Bypass | |
| Bypass state | - |
| Frost Protection | |
| Unbalance | - |
| Pre-heater | Not installed |

●●●● KPN NL 15:12 56%

Unit status 

E TASKS SCHEDULER CONFIGURATION **UNIT STATUS**

| Fans | |
|------------------------|----------------------|
| Supply fan speed | 649 rpm |
| Supply fan duty cycle | 12% |
| Supply fan flow | 66 m ³ /h |
| Exhaust fan speed | 616 rpm |
| Exhaust fan duty cycle | 13% |
| Exhaust fan flow | 64 m ³ /h |
| Power Consumption | |
| Current Ventilation | 3 W |
| Current Preheater | - W |
| Total YTOD | 0 kWh |
| Total from start | 1 kWh |
| Avoided Heating | |
| Avoided Actual | - kWh |

Zehnder Web Portal – Coming soon for installers




- Complements the app: easy access to the ComfoAir Q system via browser
- Remote access and control, even without a smartphone or tablet
- Remote diagnostics
- Secure, password-protected connection with varying access rights
- Management of multiple units
- Database for operation and fault history

The screenshot displays the Zehnder Web Portal interface. At the top, there is a table with columns: Name, Address, Zipcode, City, Last modified, and Errors. Below this is a search bar labeled 'Search list'. A second table lists units with columns: Gateway, Address, Zipcode, City, Model, Last modified, and Errors. The bottom section shows a detailed view of a Comfo Air NEO 350 unit, including its image, serial number (NL239813), firmware version (v1.00), and a note about a new firmware update. Action buttons include 'Connect to unit', 'View logfiles (1)', and 'Commissioning report'.

| Name | Address | Zipcode | City | Last modified | Errors |
|-----------|--------------|---------|--------|---------------------|--------|
| Z. Ehnder | Streetwise 1 | 777 HJ | Zwolle | 11/10/2014 09:05:17 | 1 |


Search list

| Gateway | Address | Zipcode | City | Model | Last modified | Errors |
|---------|-----------|---------|--------|-------|---------------------|--------|
| NL239 | Address 1 | 777 HJ | Zwolle | 350 | 11/10/2014 09:05:17 | 0 |
| NL239 | Address 1 | 777 HJ | Zwolle | 350 | 11/10/2014 09:05:17 | 1 |


 Comfo Air NEO 350
Serial NL239813
Operates on firmware v1.00
New firmware update available for this unit!

Connect to unit
View logfiles (1)
Commissioning report

Scenario H – at home

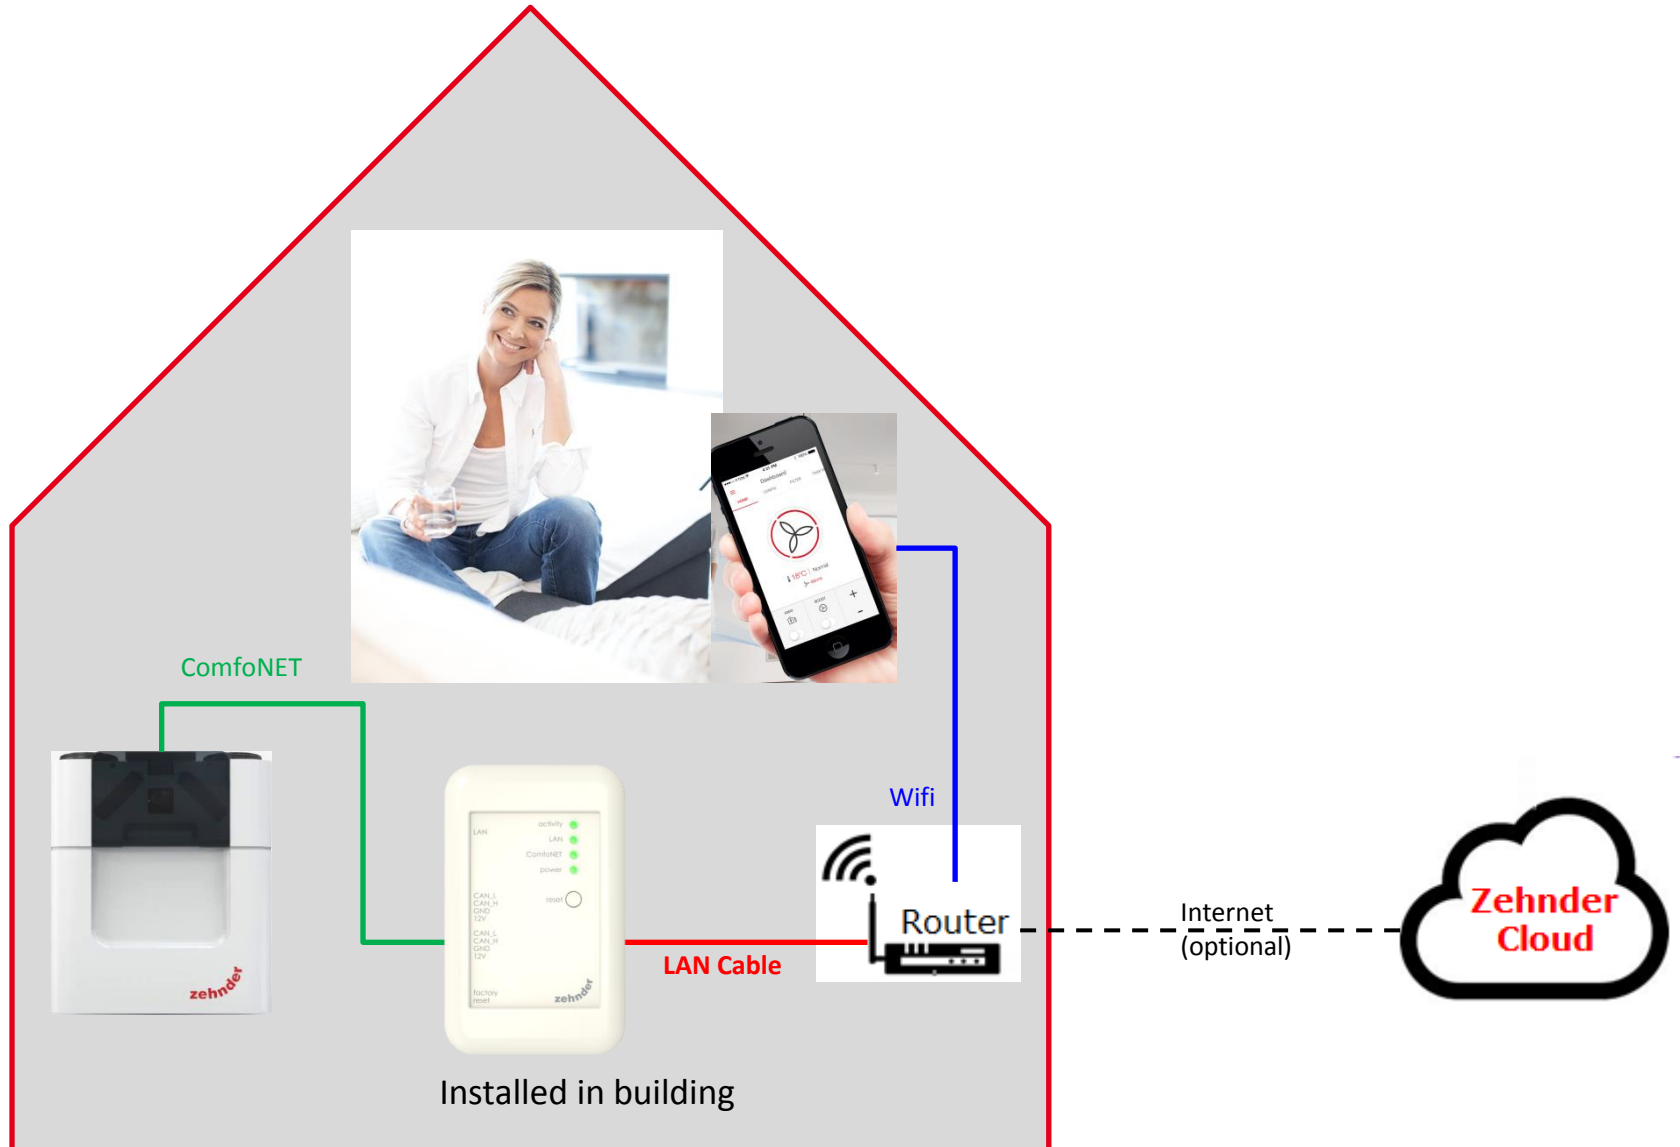

Scenario O – Out of home

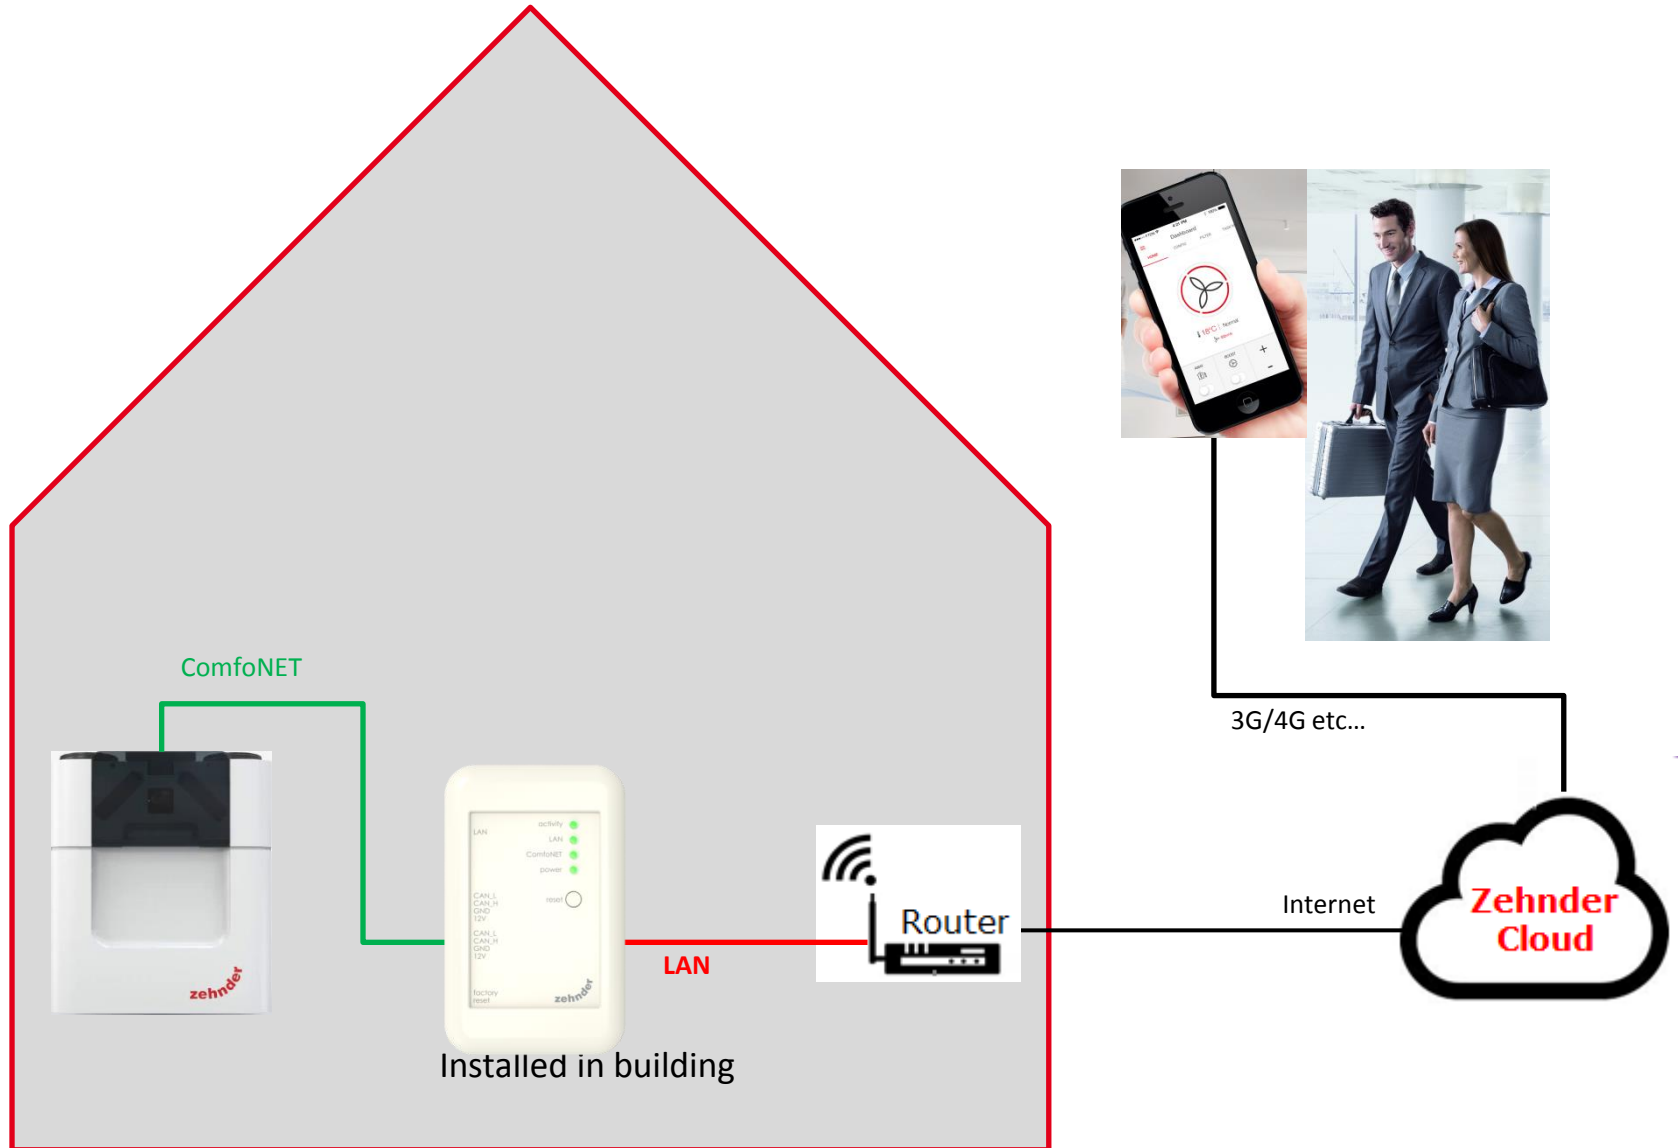

Scenario R – Remote Service by portal or app

